



Hague Main Faucet Filter Replacement

HW-MF-14-R




REPLACEMENT INSTRUCTIONS


FOR USE WITH **HW-MF-14**

INSTRUCTIONS


- 1 Turn off cold water supply under the sink.

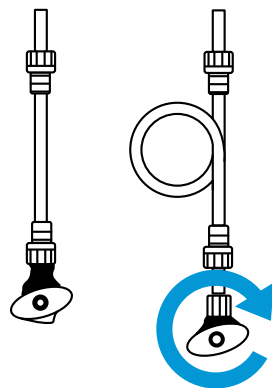

- 4 Ensure cartridge is securely attached prior to turning on water supply.

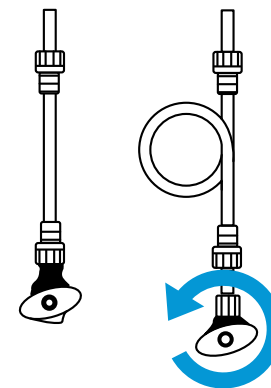


- 2 Remove the old cartridge from the manifold by rotating it to the left until it unlocks. Pull cartridge down and discard.

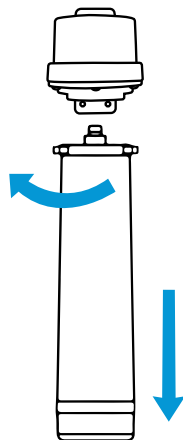

- 5 Turn on the water supply to pressurize the system and ensure there are no leaks.

- 6 Turn on kitchen faucet to cold water and run water through the cartridge at full force for at least 10 minutes. This action will purge the system of air and carbon fines ensuring maximum filter life and an effective water filtration system.

- 3 Remove new cartridge from packaging. Ensure all connection points are aligned before attaching new cartridge to the manifold. Push in the cartridge and turn to the right until it locks into place.

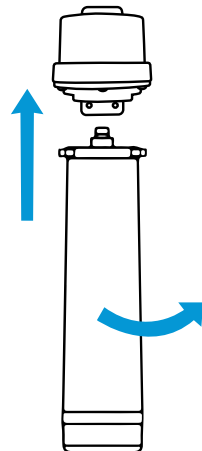

System Tested and Certified by IAPMO R&T lab and IAPMO R&T against NSF/ANSI Standards 42 and 53 and conforms to NSF Protocol as verified and substantiated by test data. Please refer to Performance Data Sheet for specific contaminant reductions.

- Systems certified for cyst reduction may be used on disinfected waters that may contain filterable cysts.
- Rated Capacity: 7,900 gallons (29,904.75 liters)
- Performance Data Sheets can be found on HagueWater.com



For use with municipally treated water only. Do not use with water that is microbiologically unsafe or of unknown water quality without adequate disinfection before or after the system.



4343 S. Hamilton Road | Groveport, OH 43125 | 614-836-2115



System Tested and Certified by IAPMO R&T lab and IAPMO R&T against NSF/ANSI Standards 42 and 53 and conforms to NSF Protocol as verified and substantiated by test data. Please refer to Performance Data Sheet for specific contaminant reductions.